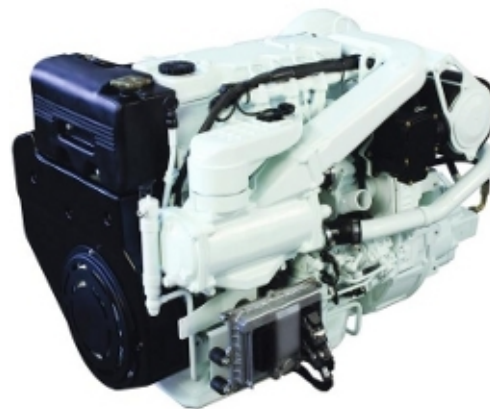


**NEF series****SPECIFICATIONS**

Thermodynamic Cycle	Diesel 4 stroke
Air Handling	TAA
Arrangement	4L
Bore x Stroke (mm)	102 X 120
Total Displacement (l)	3,9
Valves per cylinder (n°)	4
Cooling System	liquid
Direction of Rotation (viewed facing flywheel)	CCW
Engine management	by EDC (Electronic Diesel Control)
InjectionSystem	ECR

**STANDARD CONFIGURATION**


Flywheel housing (type)	SAE 3
Flywheel size (inch)	11 ½
Air Filter	rear side
Turbocharger	Fixed Geometry (water cooled) Turbo with Aftercooler (TAA)
Heat Exchanger	tube type
Exhaust gas water mixer - Exhaust cooled elbow	-
Water charge tank	included
Fuel filter (n°)	1
Fuel prefilter	included (loose)
Fuel Pump	included
Lift pump	-
Oil filter (n°)	1
Oil sump	aluminium
Oil vapours blow-by circuit	rear
Oil heat exchanger	built in the crankcase
Oil filler	n° 1
Starter	12V - 3kW
Alternator	12V - 90A
Engine stop device	by electronic central unit
Wiring harness	with negative to ground connection
Painting color	white "ICE"

**ELECTRICAL SYSTEM**

Voltage	12
---------	----

**NOT INCLUDED IN STANDARD CONFIGURATION**

Battery - minimum capacity recommended [*] (Ah)	120
Battery - minimum cold cranking capacity recommended [*] (A)	900

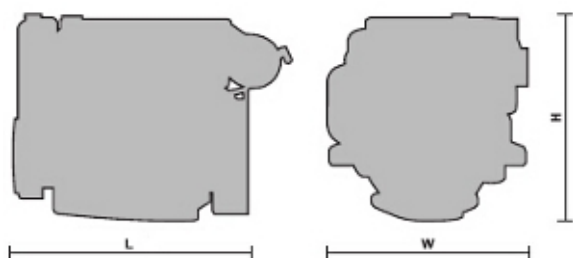**WEIGHT AND DIMENSIONS**

L = 850  
W = 708  
H = 785  
Dry Weight (without marine gear) = Kg 490

**Legend**




Arrangement	Air Handling	Turbocharger	InjectionSystem
L (in line)	TAA (Turbocharged with aftercooler) TC (Turbocharged) NA (Naturally Aspirated)	WG (Wastegate) VGT (Variable Geometry Turbocharger)	M (Mechanical) ECR (Electronic Common Rail) EUI (Electronic Unit Injector)
			SD: Stern Drive version PD (POD Drive version)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)



RATING TYPE	A1	A2	B	C
Maximum power (kW(HP)@rpm)	184 (250) @ 2800	-	147 (200) @ 2800	125 (170) @ 2800
High idle speed (rpm)	3000	-	3000	3000
Low idle speed (rpm)	± 700	--	± 700	± 700
Mean piston speed at rated speed (m/s)	11,2	-	11,2	11,2
BMEP at max power (kg/cm)	22,1	-	18,3	15,6
Specific fuel consumption at full load (best value) (g/kWh @ rpm)	212 @ 2400	-	212 @ 2400	212 @ 2400
Oil consumption at max rating (% of fuel cons.)			≤ 0.1	
Minimum starting temperature without auxiliaries (°C)			-10 °	
Oil and oil filter maintenance interval for replacement [***] (hours)			600	

[\*] Net Power at flywheel according to ISO 3046/1, after 50 hours running, Fuel Diesel EN 590. Power tolerance 5%.

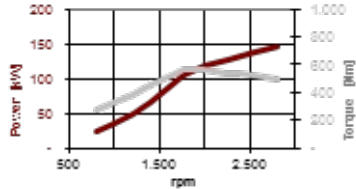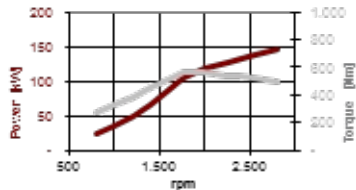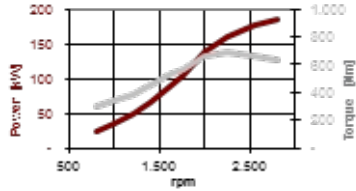

- A1 High Performance Crafts. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 300 hours per year.
- A2 Pleasure Commercial Vessels. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1000 hours per year.
- B Light Duty: Full throttle operation restricted within 10% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1500 hours per year.
- C Medium Duty: Full throttle operation < 25% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 3000 hours per year.
- D Heavy Duty

FEATURES	BENEFITS
<b>SPECIFIC FEATURES</b> The NEF range features state-of-the-art diesel technologies (Common Rail, electronic systems, 4 valve/cylinder), thus ensuring high performance, lightness, compactness, design, low environmental impact (low smoke, noise and vibration) for cruisers, yachts and light/medium duties commercial boats up to 12 metres.	HIGH TORQUE AND POWER & PERFORMANCE REDUCED FUEL CONSUMPTION AND EXHAUST GAS EMISSION
<b>TECHNOLOGICAL INNOVATION</b> Features achieved using innovative technologies and production processes such as: Electronic Common Rail, ladder frame cylinder block, fracture split connecting rods, rear gear-train timing system.	ENGINE EFFICIENCY AND STIFFNESS VIBRATION & NOISE REDUCTION
<b>TECHNOLOGICAL SOLUTIONS FOR SERVICING</b> To reduce maintenance operations and improve engine life and reliability, the NEF Series engines adopts plateau machined cylinder walls and oil cooled pistons by J-jets.	REDUCED MAINTENANCE, LONGER ENGINE LIFE AND RELIABILITY
<b>SOLUTIONS FOR LOW OPERATING COSTS</b> High functional engine design and solutions for long intervals in oil and filters replacement (up to 600 h).	REDUCED MAINTENANCE NEEDS AND OPERATING COST
<b>MARINIZATION</b> Functional engine lay-out, design and specific settings focused on marine duties. Optimized engine and turbo-charging cooling systems.	MARINE LAY-OUT AND SETTING SAFETY AND PROTECTION ON BOARD
<b>COMPONENT INTEGRATION</b> Improved technical solutions such as: integrated oil cooler, integrated oil pump and water pump, blow-by system.	LEAKAGE PREVENTION
<b>OPTION LIST</b> Wide range of accessories availability including electronic remote control, monitoring systems, international emission standards as IMO MARPOL, 2003/44/EC, 2004/26/EC, EPA Recreational & Commercial and propulsion homologation as RINA. Specific for pleasure duty, stern drive and POD drive availability completes and optimizes the NEF Series application for a wide range of boat types and propulsion solution.	CUSTOMER ORIENTATION
<b>SERVICEABILITY &amp; MAINTAINABILITY</b> Easier engine servicing thanks to advanced diagnostic equipment & widespread worldwide service network.	QUICK AND ACCURATE SERVICE SUPPORT

FPT INDUSTRIAL OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE

